



HYDROGEN WATER PITCHER OWNER'S MANUAL





Table of Contents


Benefits	3
SAFETY INSTRUCTIONS	4
Parts	6
Charging Instructions.....	7
Display Information	8
How to Use	9
How to Clean	10
Troubleshooting	11
Product Specifications.....	13
Product Warranty	14

The fastest way to reach customer support is to email them at support@echoh2o.com



Benefits of Hydrogen Water Pitcher

- The Hydrogen Water Pitcher can produce hydrogen-enriched water in 10 and 20-minute cycles. Producing 1.4 ppm of molecular hydrogen for the 10-minute cycle or up to 1.7 ppm of molecular hydrogen for the 20-minute cycle.
- Specialized casing keeps hydrogenated water pure and fresh after filtering.
- Built-in rechargeable battery allows the Echo H2 water Pitcher to be used anytime and anywhere.
- Eco-friendly and made of tritan plastic which is BPA free.

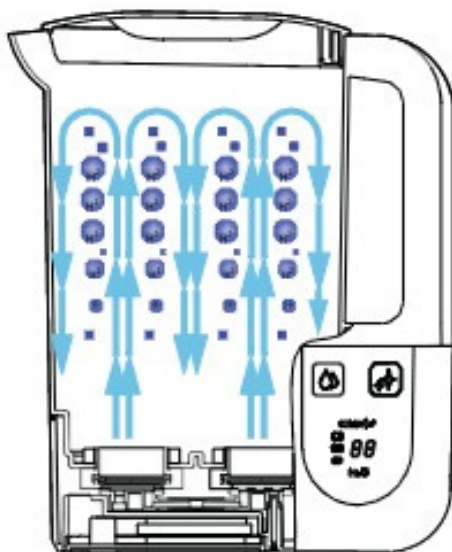



SAFETY INSTRUCTIONS

Please be sure to follow these instructions to prevent electric shock, fire, or explosion which could result in personal injury or product damage

DO NOT

- Put pitcher in the microwave.
- Put pitcher in a dishwasher.
- Freeze.
- Disassemble, repair, or modify the pitcher.
- Soak your product in water. (Cover can be washed.)
- Use product if an abnormality occurs.
 - See pages 11 & 12 for troubleshooting options
- Touch the power plug with wet hands; this can cause electric shock, fire, and product failure.
- Allow children to operate or handle the pitcher
- Use carbonated beverages, green tea, or alcohol in the pitcher
- Use water above 140°F/60 °C
- Move the pitcher during hydrogen generation.
- Clean the interior of the pitcher with chemical detergent. The electrode will be damaged.
- Use excessive force
 - if the product falls, is thrown, or is dropped call Customer Care (see page 2)



SAFETY INSTRUCTIONS


Please be sure to follow these instructions to prevent electric shock, fire, or explosion which could result in personal injury or product damage

- Use only DC 5V. Do not charge with a voltage higher than DC 5V -2A.
- Keep oxygen outlet on the underside of the pitcher unobstructed.
- Only use manufacturer-certified replacement parts and charging cables.
- Using the pitcher without water may cause electrode damage.
- If non-water drinks are used, wash the pitcher with citric acid within 1 hour.
- Only use water when cleaning the exterior of the pitcher. Other detergents/chemicals may cause the pitcher to be discolored or lose paint.
- If the electrodes are completely dry or the product has not been used for one week or longer. Fill the pitcher with water and use after 20 minutes.
- Only use filtered water (Reverse Osmosis or Distilled Water) in hydration process.


If the electrodes have calcium build up or are damaged, performance can be degraded. Do not clean the interior of the pitcher with chemical detergent.

Parts


Side View

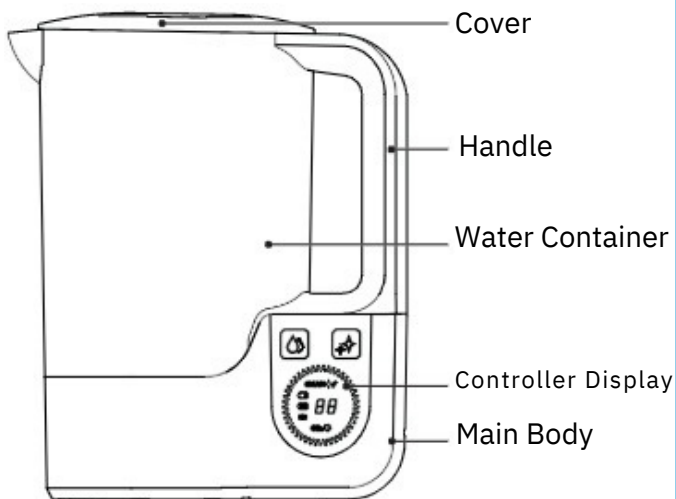

Bottom View

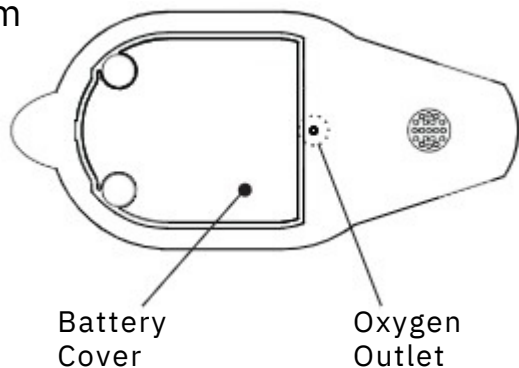

Charging

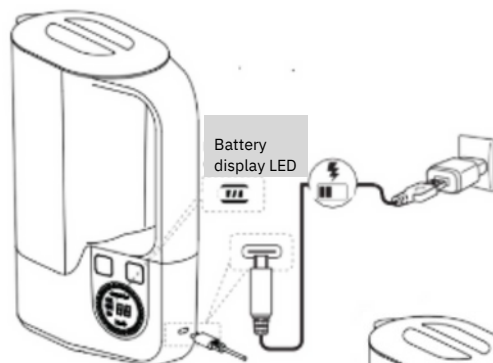

For Outlet Charging:

Connect the C type USB cable to the outlet adapter and to the USB port of the pitcher.

Using a Portable Charger:

Charge portable charger before use.

Connect the C type USB cable to the portable charger and to the USB port of the pitcher.



- Product can be used while charging.
- If the battery display LED is Red, the pitcher is charging. if the LED Display is Green, the pitcher is fully charged.
- Use a charging adapter with 5V, 2A or higher.
- Hydrogen generation is more effective when pitcher is fully charged.




Display Information

■ Hydrogen Water Button

-Start/stop button 10 minute/20 minute cycle duration select - Mute/Unmute function

■ End of Operation mute/unmute indicator

-Press hydrogen water button 3 times to mute/unmute end of operation chime.

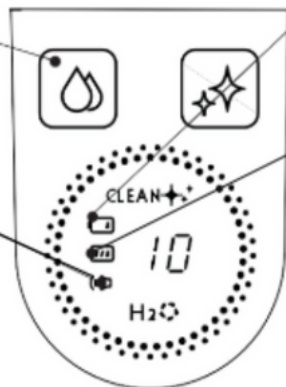

■ Low Battery Indicator

-If LED flickers or blinks battery needs to be charged.

■ Battery Life Indicator

-**Red**: Needs to be charged, or is charging.

-**Green**: Product is fully charged.

■ Electrode Washing Display


■ Time and Error Display

-10 minute or 20 minute mode
-Remaining time in filtration cycle.

ERROR Display.

EL : Low Current

: No water.

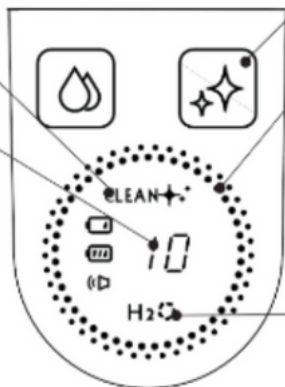

■ Cleaning Mode Button

-Place finger on button up to 5 seconds.

■ Operating State Display

-**Blue**: 10 minute mode.

-**Green**: 20 minute mode.

-**Red**: Electrode Cleaning mode.

Three flashes indicate end of filtration cycle.

■ Hydrogen Water Generation Selection display LED.

Error Display.

EL

•Operation in low current or electrode dry condition.

•Water container is empty

•Activate with warm water (140°F/60°C or less) and use

•Fill the water container with water and use.

How to Use

Before first use, open the top cover and **unscrew and remove the electrode moisture retention caps (2 pieces)** inside the water pitcher. The moisture retention caps prevent electrodes from drying out during distribution.

- If the pitcher will not be used for more than a week, fill the electrodes with water and lock the moisture retention cap by screwing them in place. **It is important to remove caps before next use.**

For first use or if you have not used the pitcher for more than one week, follow cleaning procedures. (see page 10)

Open the top cover and fill with filtered water (Reverse Osmosis Water or Distilled Water).


10 Minute Cycle:

Press and hold the Hydrogen Water Button for 2 seconds and the **BLUE LED** will light up at the bottom. Display will show 10 minutes. After 10 minutes, the Hydrogen Water Pitcher will turn off automatically. It is normal for the **BLUE LED** light to flash while cycle is running.


20 Minute Cycle:

For higher concentrations of hydrogen, press the operating button twice and the **GREEN LED** will light on the bottom. After 20 minutes, the Hydrogen Water Pitcher will turn off automatically. It is normal for the **GREEN LED** light to flash while cycle is running.

If you want to stop generating hydrogen, press and hold the Hydrogen Water Button for 2 seconds, hydrogen generation will stop and pitcher will turn off.

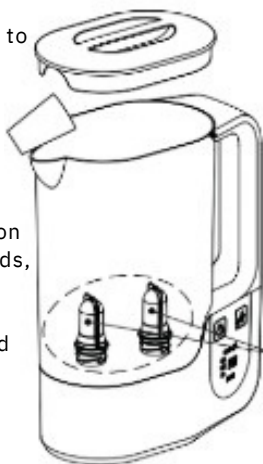

Electrode
Moisture
Retention
Caps
(Remove by
unscrewing
before use)

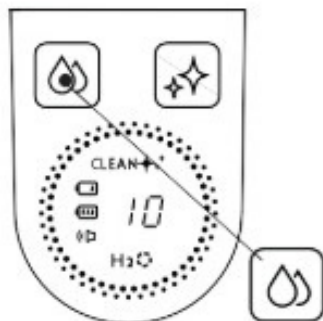

Hydrogen Water Button



How to Clean

Cleaning Procedure

- When using for the first time, remove retention caps. Then put approx. ¼ cup (50cc) of water (68°F~104°F/20 °C~ 40°C) in a cup, dissolve 2 tsp/10g of baking soda into the water.
- Once fully dissolved, pour water/baking soda solution into Pitcher and leave for about 1 hour. (leaving it for 1-2 hours will have a better cleaning effect.)
- After 1 hour, rinse with water (Distilled Water or RO water) 2 ~ 3 times before use.
- Fill the Pitcher with water(Distilled Water or RO water around (68°F~104°F/20 °C~ 40°C) about 2/3 full and run the cleaning mode 2 ~ 3 times. For best results change the water each time (flashing **RED LED** turns on when cleaning mode is activated)
- Clean the inside with a soft cloth, cotton swab, or sponge. If dust or dirt is not removed, add some water and gently swirl several times.

Extra Cleaning Tips

- For better cleaning, use with the power cable connected.
- Water that is rich in minerals may have cloudy bubbles and less hydrogen bubbles. If there are less hydrogen bubbles, use the above cleaning mode before use.
- Water Container Cleaning-Clean the Pitcher with a soft cloth or sponge, etc., and thoroughly rinse it before use.
- Product Appearance -Wipe off dust and dirt from the pitcher/kettle with a wet cloth. (Keep water away from power terminal and battery)

Long-term use of the pitcher/kettle may cause the electrode to smell. The smell of the electrode has nothing to do with hydrogen production and does not affect the taste of water. Periodically, clean the electrode and pitcher/kettle to prevent odors. Smell may require several cycles of cleaning to remove.




1

Add baking soda to water and stir until dissolved.



2

Pour baking soda mixture into Pitcher.



Cleaning Button



Troubleshooting

Please check the following before requesting repairs. If the same abnormality occurs after the action is taken, please contact the customer service at support@echoh2o.com

Problem	Cause	Solution
Hydrogen bubbles are weak or not generated.	Product not at full power or charged.	Check battery and charge if needed.
	Foreign matter in electrode.	Clean the electrodes according to page 10.
	Bottom oxygen outlet blocked.	Position oxygen outlet on the bottom so that it is not obstructed.
	Not used for an extended period of time.	Add water to electrodes, continue to use the pitcher to stabilize. (page 9-10)
LED is not illuminated.	Product is not charged.	Check battery and charge if needed.
Thick bubbles occur.	Electrodes are dry or not yet stabilized.	Wet electrodes with water. Continue using the pitcher to stabilize. Operate 2 or 3 times with warm water (140°F/60°C or less).
Low battery light blinks during hydrogen water generation.	Low Battery.	Charge the Hydrogen Water Pitcher.




Troubleshooting (cont.)

Please check the following before requesting repairs. If the same abnormality occurs after the action is taken, please contact the customer service at support@echoh2o.com

Problem	Cause	Solution
Not charging	Poor connection	Check that the charging terminal and cable have a solid connection
	Charger or cable failure	Check for visible cable damage. Use a different USB C cable, use a different USB/Outlet adapter
Hydrogen water is generating a fine mist	Unstable electrodes	Turn off the power, clean and stabilize (pg 10)
Small leaks to the oxygen outlet	Drying/dried electrode part	Pour warm water (less than 140°F/60°C) to use the electrode area sufficiently wet for more than 10 minutes
Operation sound when hydrogen water is generated.	Hydrogen bubble generation sound	This is a normal occurrence
Odor from electrodes	Prolonged period since cleaning	Clean system (pg 10)



Product Specification

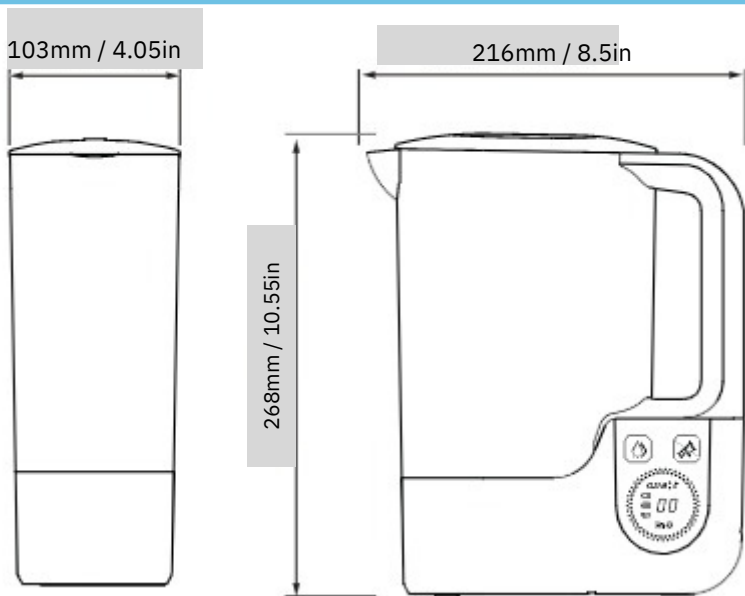

Name of Model	Echo H2 Pitcher	
Hydrogen Capacity	1,700 cc	1.7 liter
ORP	-450 ~ -900 mV	
Use Temperature	10 ~ 40 °C	50 ~ 104 oF
Body Weight	About 850g	About 1.9 lbs
Size	W 216 × D 103 × H 268mm	W 8.5 x D 4.05 x H 10.55 in
Operating Time	10 minutes or 20 minutes	
Charge Time	About 90 ~ 150 min	
	DC 5V 2A	

5-Year Product Warranty

Product	Echo H2 Pitcher	Model Number	EH2P
Serial Number			
Date of Purchase			
Company	Echo Technologies LLC	Customer Support Phone	+1-855-737-1114
Company website	www.echoh2o.com	Customer Support Email	support@echoh2o.com
Notes:			

For Warranty information see the QR Code below or visit <https://echoh2o.com/echo-technologies-product-warranty/>

